





SCHAERER COFFEE CLUB

Category	Equipment and options	Schaerer Coffee Club
Output per day	Recommended daily output	80
Output per hour	Beverage output per hour (coffee, espresso)	bis 60
Range of beverages	Ristretto	s
	Espresso	s
	Coffee/café crème	s
	Small pot (250 ml)	s
	Milk coffee/latte	s
	Cappuccino	s
	Latte Macchiato	s
	Chociatto	o
	Hot milk	s
	Hot milk foam	s
	Hot water	s
	Steam	s
	Powder-based beverages	o
Operation and dispensing	Self-service mode	s
	Number of beverages possible (programmable)	40
	Fixed outlet height [mm]	175
	Cup platform can be adjusted manually	s
	Separate hot water dispensing	s
	Single outlet	s
	Double outlet	s (coffee)
	Barista key	s
	Adjustment of the beverage size	s
Grinders and containers	1 grinder	s
	2 grinders	o
	Bean hopper [g]	550
	Bean hopper enlargement [g]	1100
	Ground coffee inlet	s
Boilers	Hot water boiler for coffee	s
	Steam boiler	s
Milk systems and cooling units	Milk Smart (MS)	s
	Side cooling unit (BKE)	o


Category	Equipment and options	Schaerer Coffee Club
Powder system	Powder container [g]	450
	Container enlargement [g]	1250
	Twin powder container [g]	2 x 450
	Topping (1x Topping powder), e.g. milk powder	o
	Chocolate (1x Choco powder)	o
	Choco/Topping (1x Choco powder and 1x Topping powder)	o
Steam	Powersteam	o
	Supersteam	o
Other options	SteamIT steam cup warmer	s
	Grounds container [coffee grounds cake]	30
	Under-counter grounds disposal	o
	Lighting	s
	Trolley	o
Payment system	Payment systems (MDB-S/DIVA2/DIVA2 Max)	o
	Coin & token tester	o
	Coin changer	o
	M2M Coffee Link	o
Colours	Black matt	s
Dimensions	Width [mm]	325
	Depth [mm]	570
	Height [mm]	501 [556 mm with bean hopper enlargement and lock]
	Weight [kg] (net)	25,5
Power supply and consumption	1L, N, PE: 220-240 V- 50/60 Hz	1700-2300 kW 10-16 A 3 x 0.75 mm ² or 3 x 1 mm ²
Water supply and disposal	Internal drinking water tank [l]	4.5
	Mains water supply with mains water kit	o

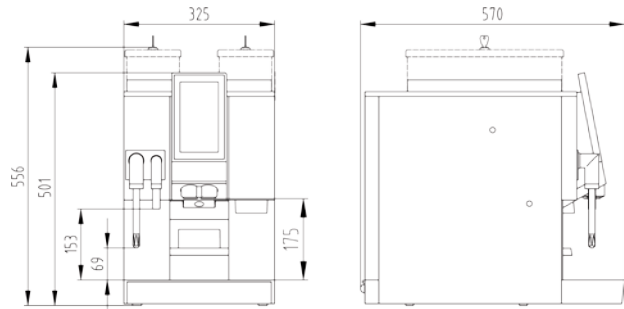

Schaerer Coffee Club

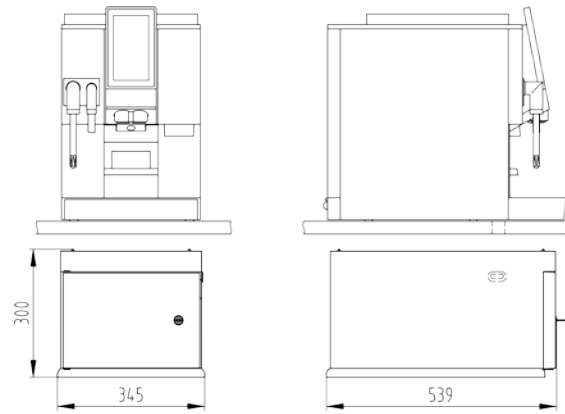

Under-machine cooling unit
under the coffee machine

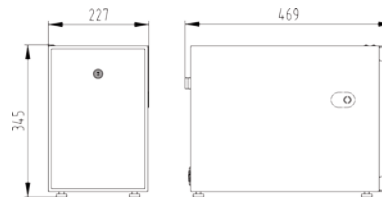

Side cooling unit